


RFID card reader SecureEntry-CR100RS

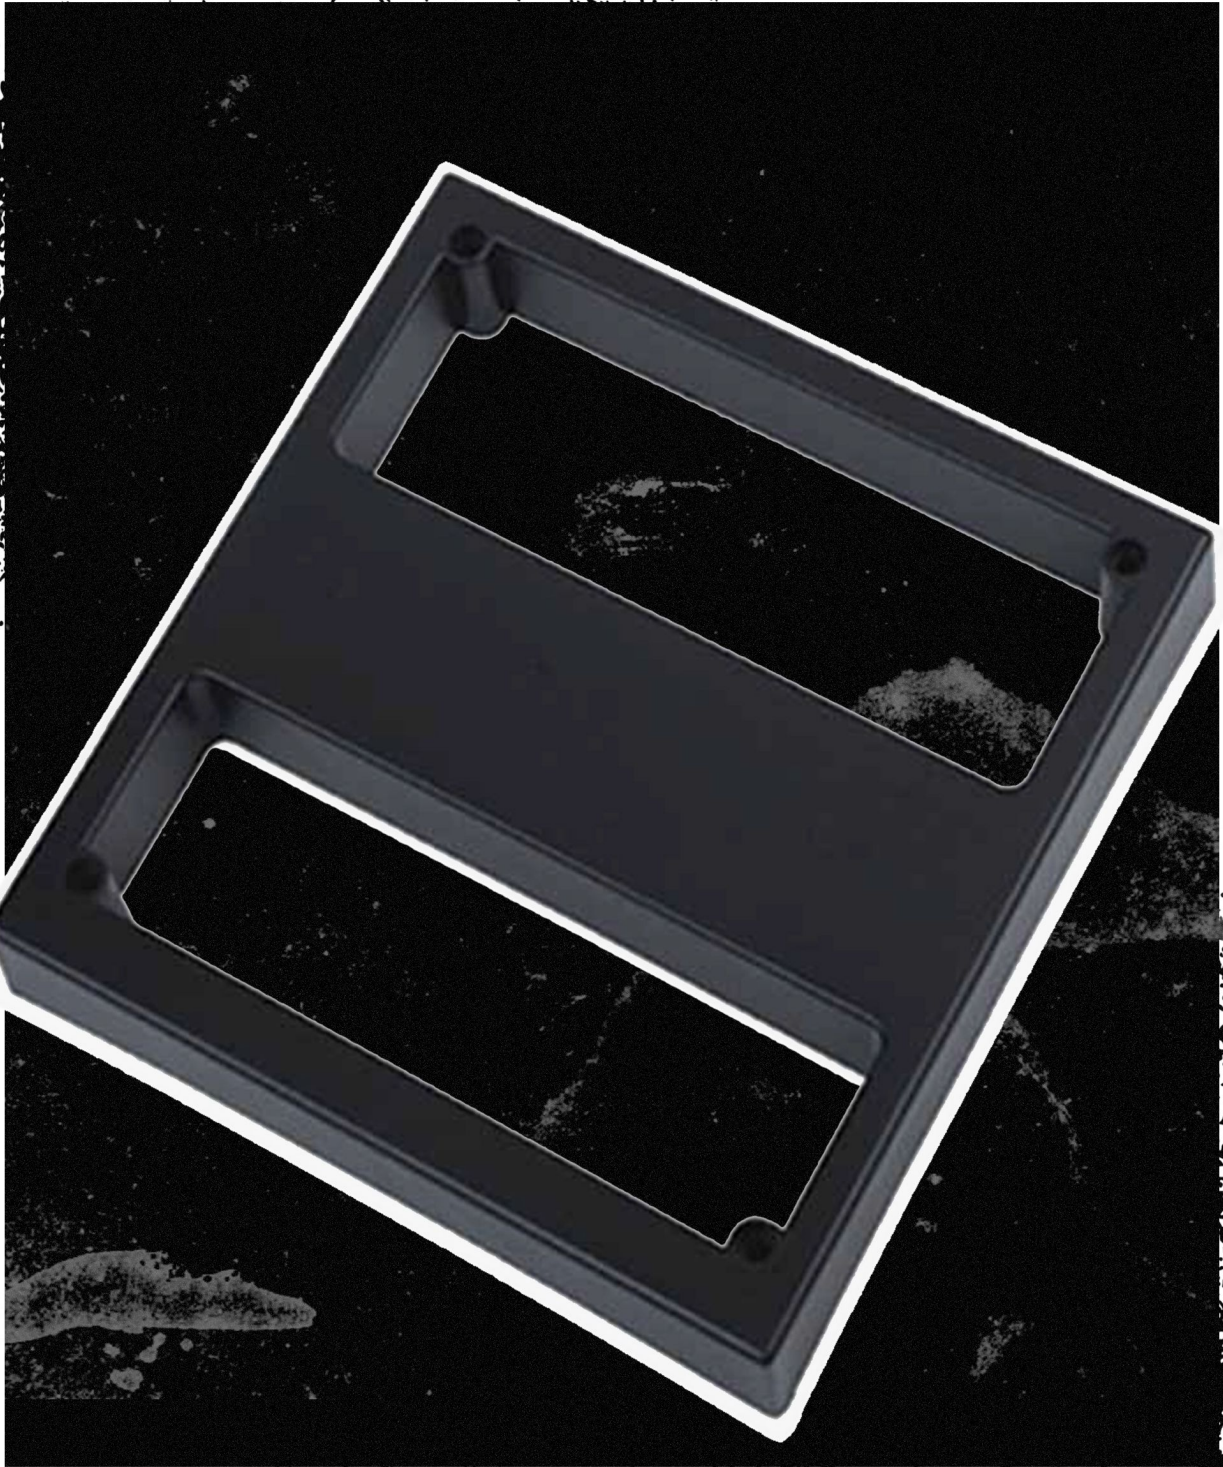

SecureEntry-CR100RS is a rugged, outdoor RFID reader. The device operates at a frequency of 125 kHz and offers a DC voltage of 12V. The reader is equipped with RS232 interface. Offers verification via RFID card **and can be used for building access control.**

RFID card reader SecureEntry-CR100RS

Model	SecureEntry-CR100RS	Communication distance	≤1200 m
Type of device	RFID card reader for access control	Operating temperature	-10°C ~ 70°C
Verification type	RFID card	Dimensions of the device	23 x 23 x 3,5 cm
Frequency of operation	125 kHz	Package dimensions	27,7 x 25 x 5 cm
Operating voltage	DC 12V	Weight of the device	3 kg
Operating current	≤100mA	Weight with packaging	4,5 kg
Reading distance	80 ~ 100 cm		
Interface	RS232		
Readable RFID cards	EM		

