


1

RFID access control reader SecureEntry-CR50HF

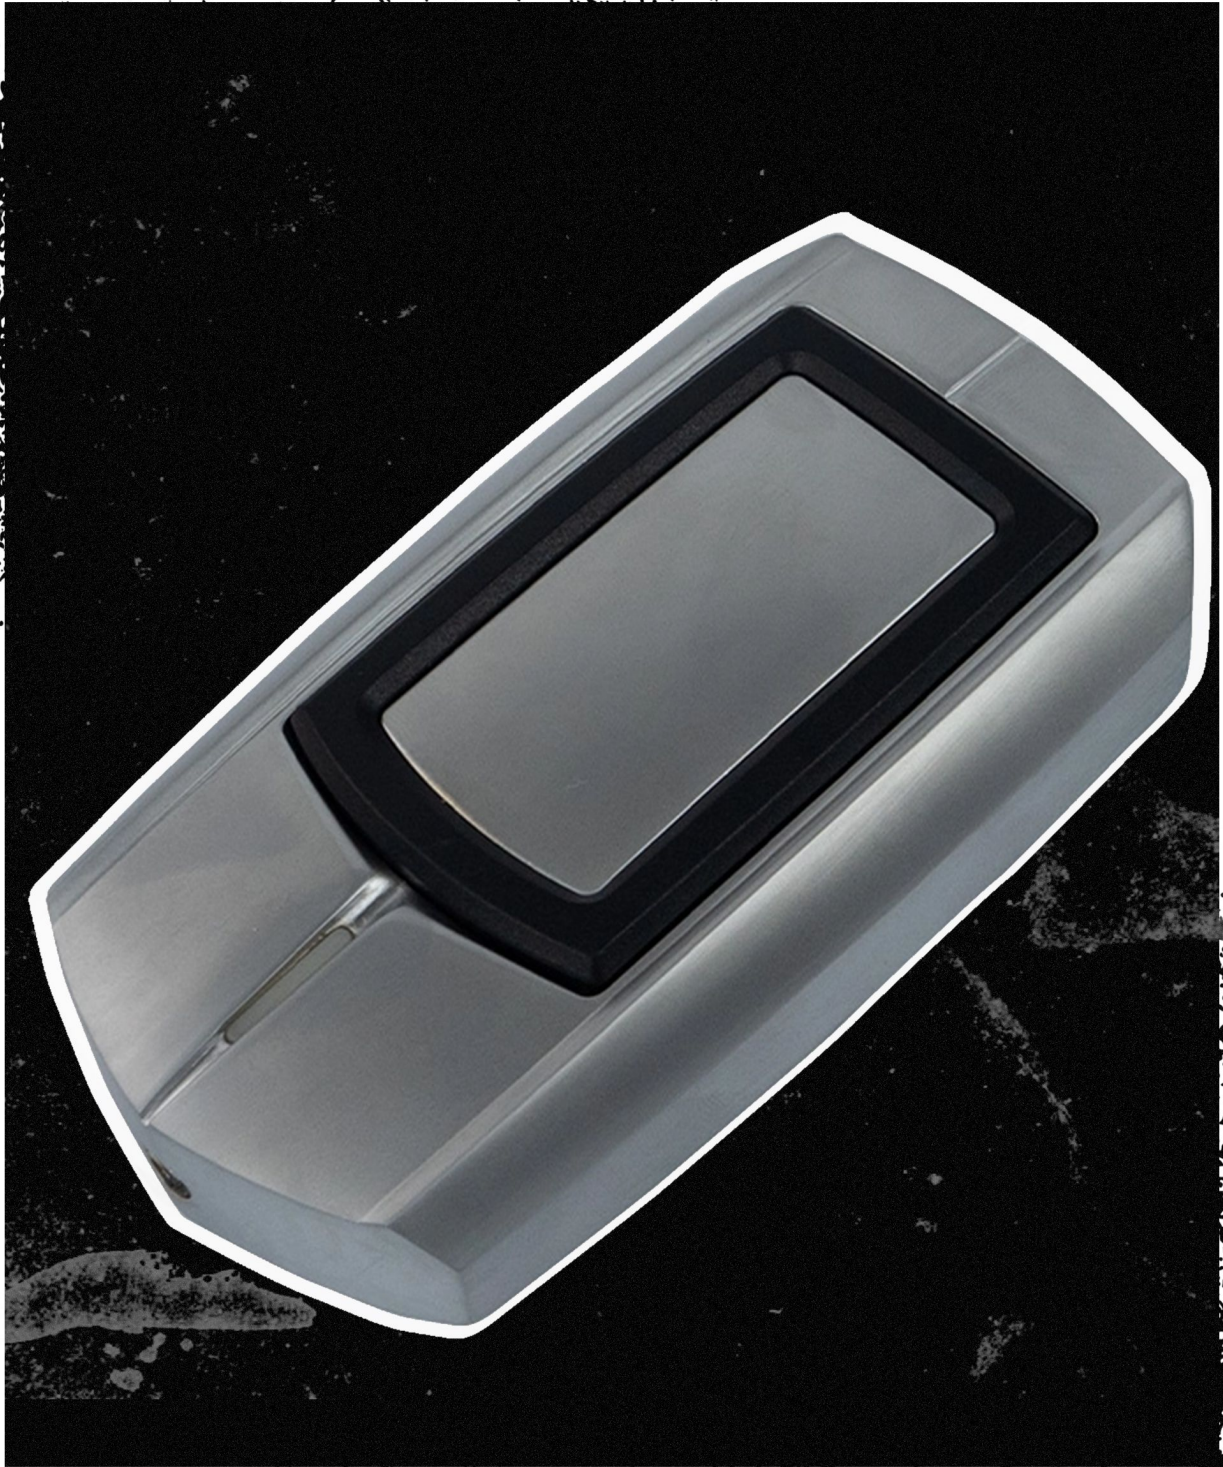

SecureEntry-CR50HF is an access control reader designed for building access management. It offers 13,56 MHz frequency and allows you to unlock the door with an RFID card. Robust design and metal housing with IP68 protection, provide resistance to damage and protect against the ingress of water into the device.

RFID access control reader SecureEntry-CR50HF

Model	SecureEntry-CR50HF	Interface	Wiegand 26/34
Color	silver	Supported RFID cards	13,56 MHz Mifare
Device type	RFID reader with access control	Access control	yes
Verification type	RFID card	Degree of protection	IP68
Fabrication material	metal	Operating temperature	-25° C to 75° C
Speed of response	less than 0.2 seconds	Operating humidity	10%-90%
Proximity range	3-10 cm	Product dimensions	12x6,5x2,1 cm
Communication distance	100 meters	Package dimensions	14,2x9,2x4,3 cm
Data transfer	in real time	Product weight	400 g
Operating voltage	DC9V-16V, standard 12V	Weight with packaging	500 g
Operating current	70 mA		
Light signal	Built-in LED (two-color)		
Sound signal	Built-in speaker (buzzer)		

