


1

## RFID access control reader SecureEntry-CR50LF

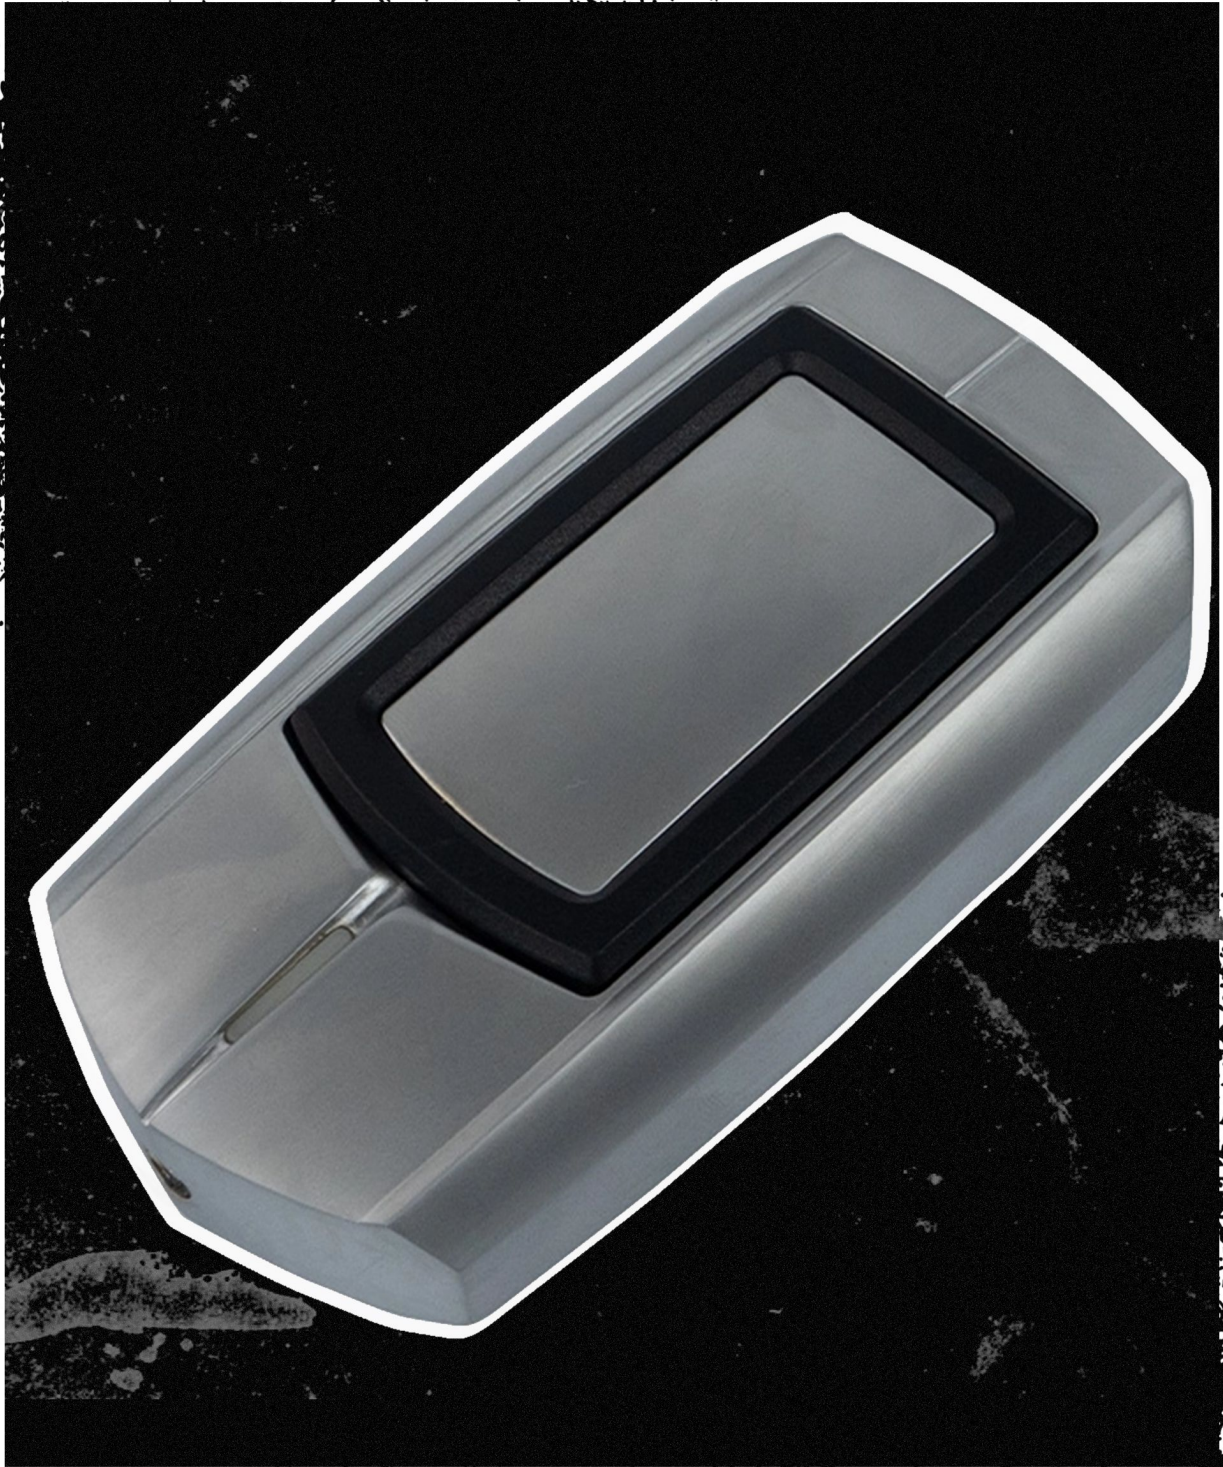

**SecureEntry-CR50LF is an access control reader designed for building access management. It offers 125 kHz frequency and allows you to unlock the door with an RFID card. Robust design and metal housing with IP68 protection, provide resistance to damage and protect against the ingress of water into the device.**

# RFID access control reader SecureEntry-CR50LF

<b>Model</b>	SecureEntry-CR50LF	<b>Interface</b>	Wiegand 26/34
<b>Color</b>	silver	<b>Supported RFID cards</b>	125 kHz EM
<b>Device type</b>	RFID reader with access control	<b>Access control</b>	yes
<b>Verification type</b>	RFID card	<b>Degree of protection</b>	IP68
<b>Fabrication material</b>	metal	<b>Operating temperature</b>	-25° C to 75° C
<b>Speed of response</b>	less than 0.2 seconds	<b>Operating humidity</b>	10%-90%
<b>Proximity range</b>	3-10 cm	<b>Product dimensions</b>	12x6,5x2,1 cm
<b>Communication distance</b>	100 meters	<b>Package dimensions</b>	14,2x9,2x4,3 cm
<b>Data transfer</b>	in real time	<b>Product weight</b>	400 g
<b>Operating voltage</b>	DC9V-16V, standard 12V	<b>Weight with packaging</b>	500 g
<b>Operating current</b>	70 mA		
<b>Light signal</b>	Built-in LED (two-color)		
<b>Sound signal</b>	Built-in speaker (buzzer)		

