

Manual

3-monitor mount **SolidHand-AS03**

Table of contents

Specifications:	3
Set contents:.....	4
Features:	4
Installation Tips.....	5
Assembly.....	6

Specifications:

- **Warranty:** 1 year
- **Color:** Matte Black
- **Material:** Aluminum, Steel, Plastic
- **Surface Finish:** Powder Coating
- **Number of monitors:** 3
- **Min. monitor diagonal:** 17"
- **Max. monitor diagonal:** 27"
- **Standard VESA:** 75x75, 100x100
- **Monitor Weight:** 7kg
- **Height adjustment:** supported by a mechanical spring
- **Arm swivel range:** +180° ~ -180°
- **Monitor swivel range:** +90° ~ -90°
- **Monitor tilt range:** +35° ~ -35°
- **Max. arm reach:** 703 mm
- **Pole height:** 433 mm
- **Handle dimensions:** 1418 x 161 x 564 mm
- **Package dimensions:** 440 x 360 x 160 mm
- **Handle weight with packaging:** 7.3 kg

Set contents:

- Monitor mount,
- screws and mounting washers,
- Assembly instructions.

Features:

- **Number of monitors:** 3
- **Mounting:** Desk
- **Max. monitor weight:** 7 kg
- **Height adjustment:** supported by a mechanical spring
- **Standard VESA:** 75x75, 100x100
- **Display diagonal:** 17" to 27"
- **Pivot function:** yes
- **Built-in USB ports:** none

Installation Tips

CAUTION: Using the product with a load greater than the indicated permissible load may lead to instability, which may result in possible injury.

Please follow the installation instructions closely. Improper installation may result in damage or serious personal injury.

Ensure that the supporting surface can securely support the combined weight of the equipment and all attached mounting hardware and components.



Use the included mounting screws and **DO NOT over-tighten** the mounting screws.

The product contains small components that may present a choking hazard if swallowed. Keep these items away from children.


The product is intended for internal use only. Using this product outdoors may lead to product failure and personal injury.

IMPORTANT: Make sure you receive all parts according to the component list before installation. If any parts are missing or defective, please contact us.


Assembly

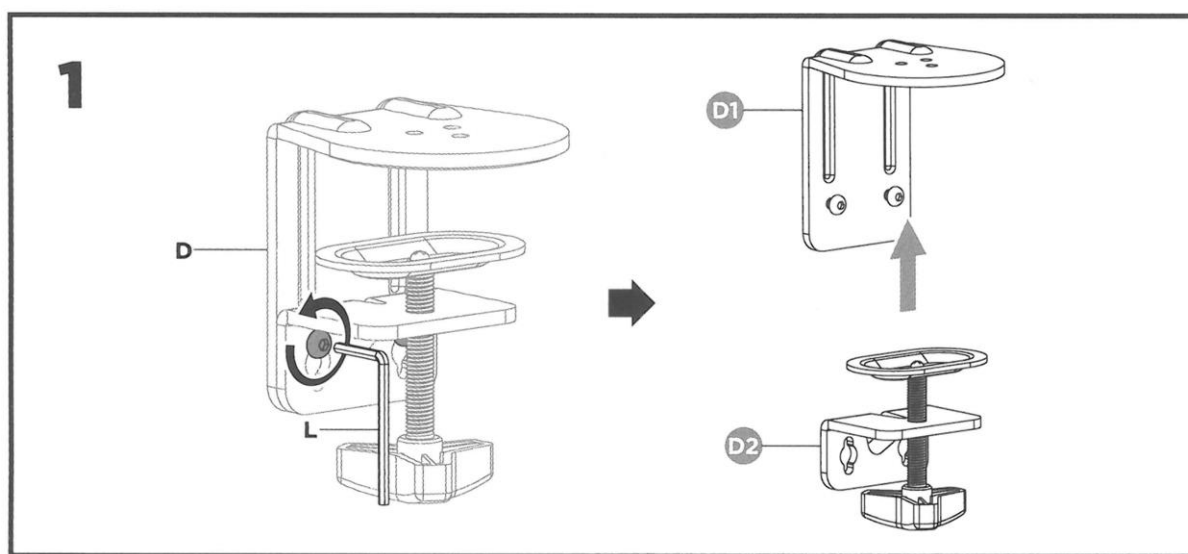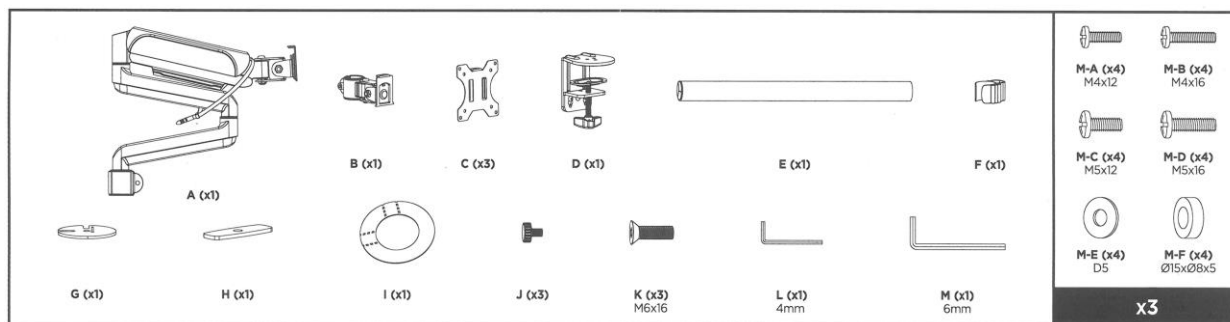

2 Clamp Mounting

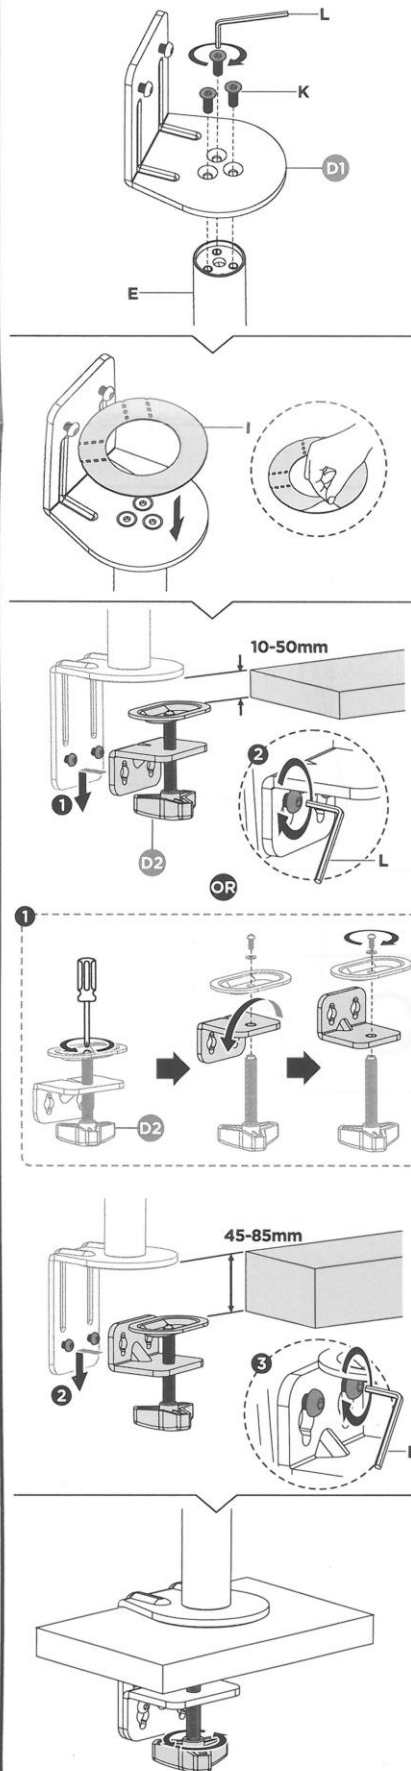

Grommet Mounting

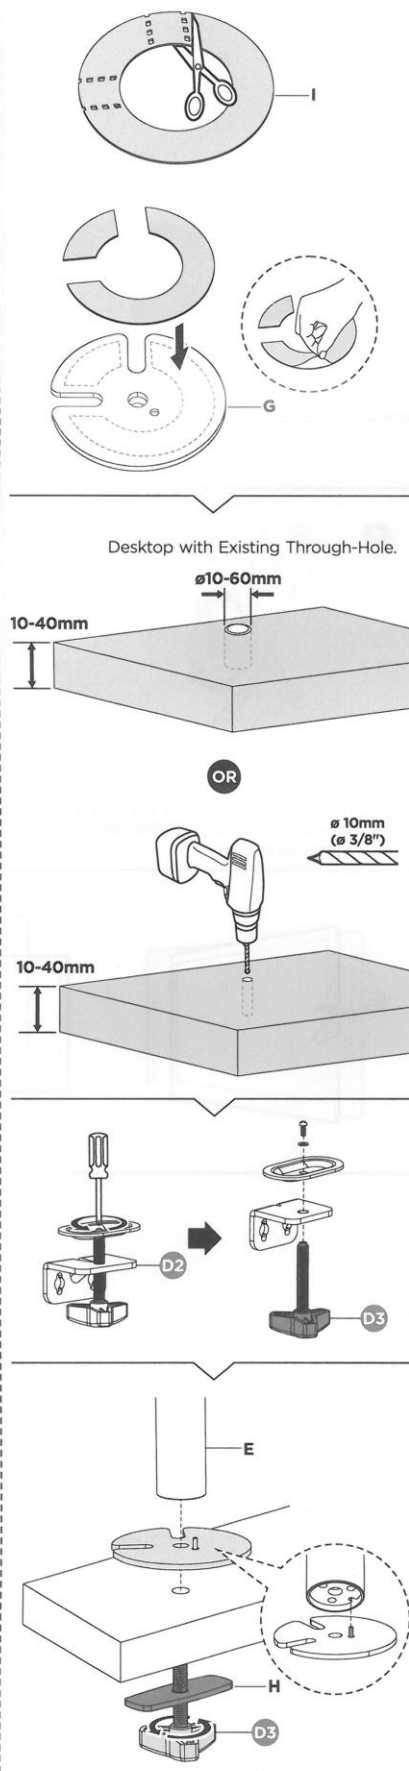


3








WARNING:

1. Firmly hold the two halves of the spring arm together and have another person cut Off the cable tie from around the spring arm.
2. Slowly release the pressure on the spring arm and allow it to gradually stretch to its full extension.

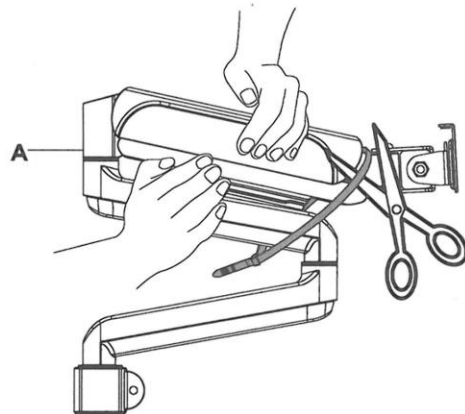


4

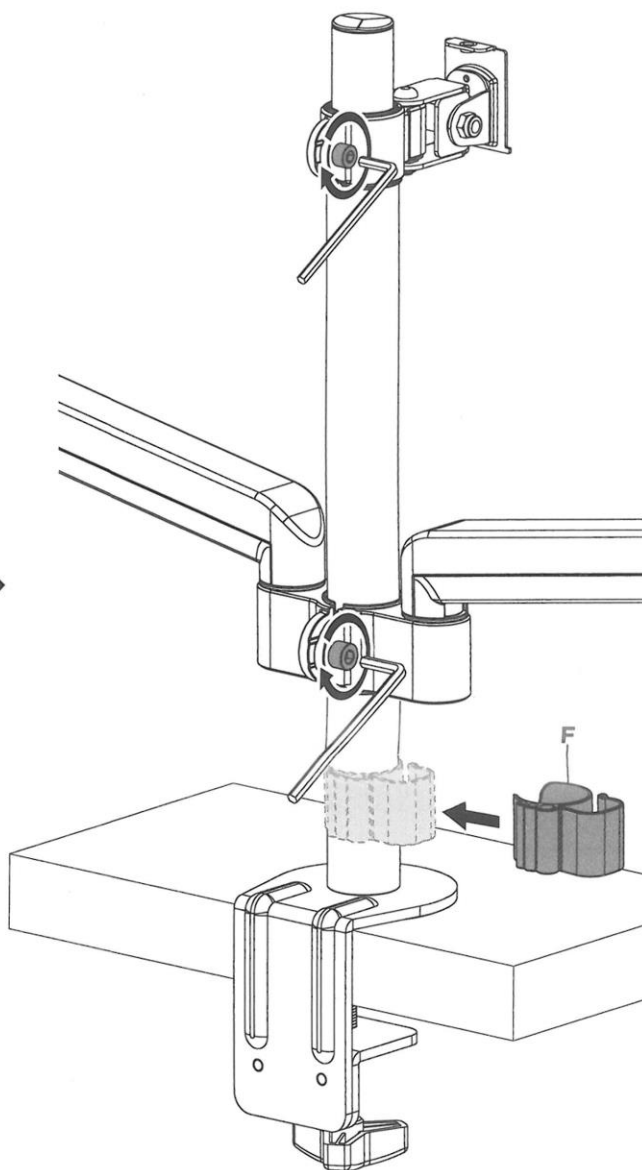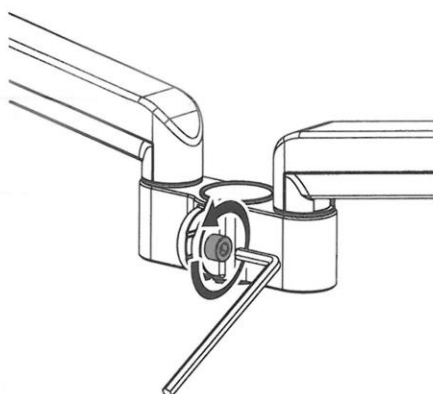

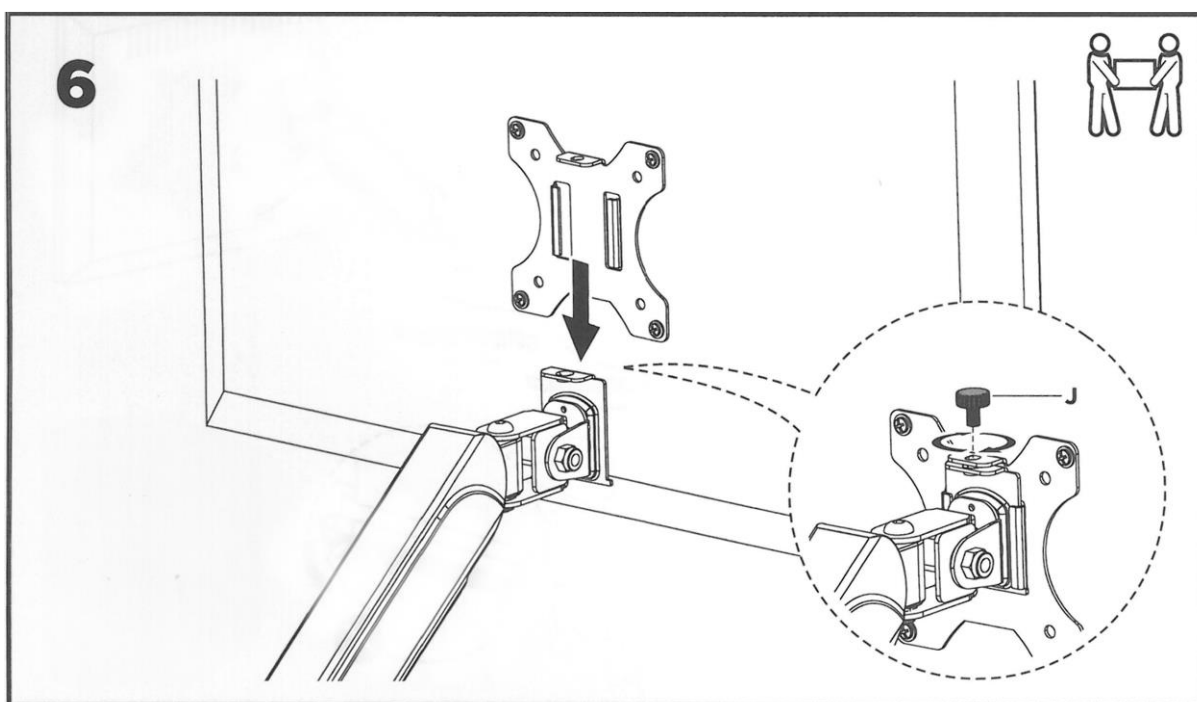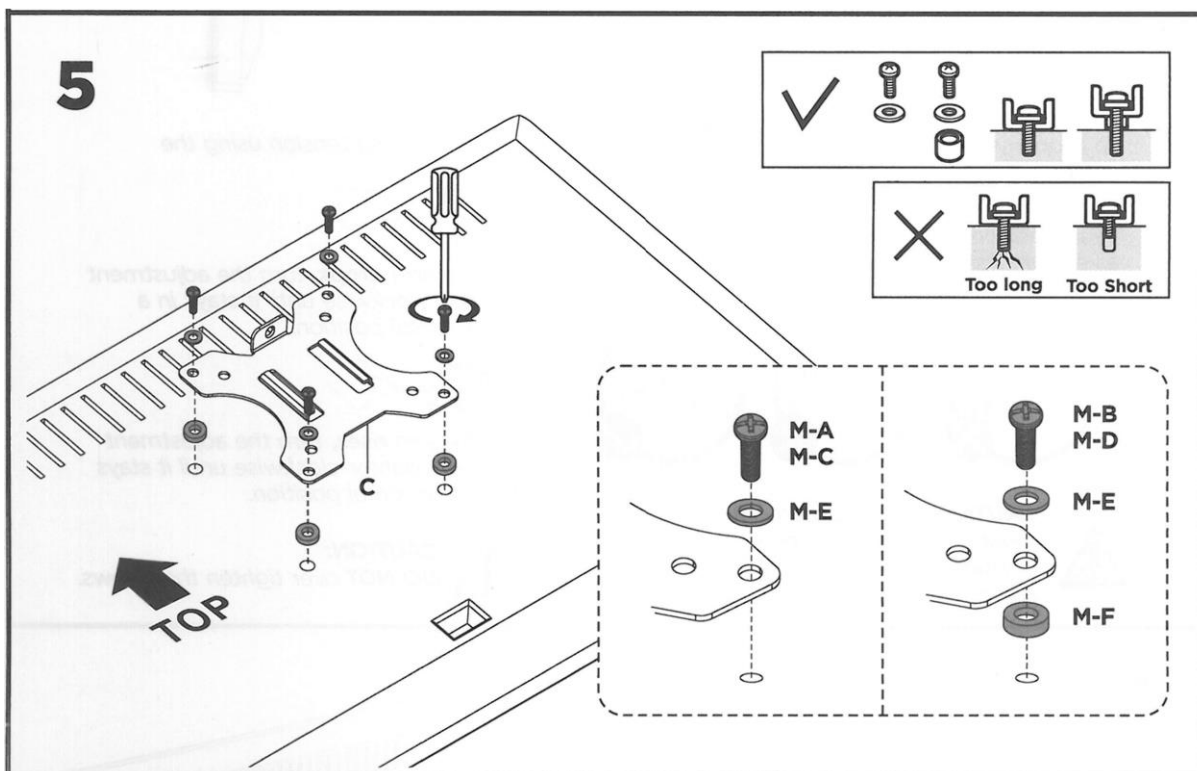

7

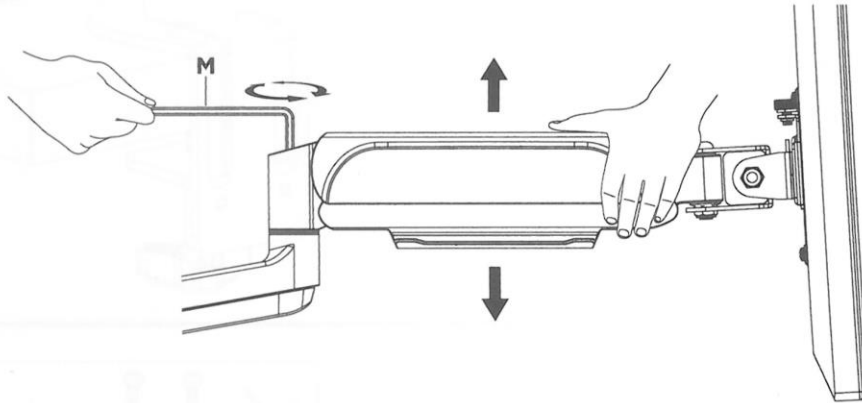


To properly balance the arm with monitor mounted, adjust the spring tension using the supplied Allen Key as follows:


First, position and firmly hold the arm horizontally as shown. Ask for assistance should you require it.



CAUTION: To avoid damage to monitor or mount, always keep the arm in a horizontal position while making adjustments. Again, ask for assistance if required.



If the arm **drops**, turn the adjustment screw clockwise until it stays in a horizontal position.




If the arm **risers**, turn the adjustment screw counter-clockwise until it stays in a horizontal position.




CAUTION: **DO NOT** over tighten the screws.

8

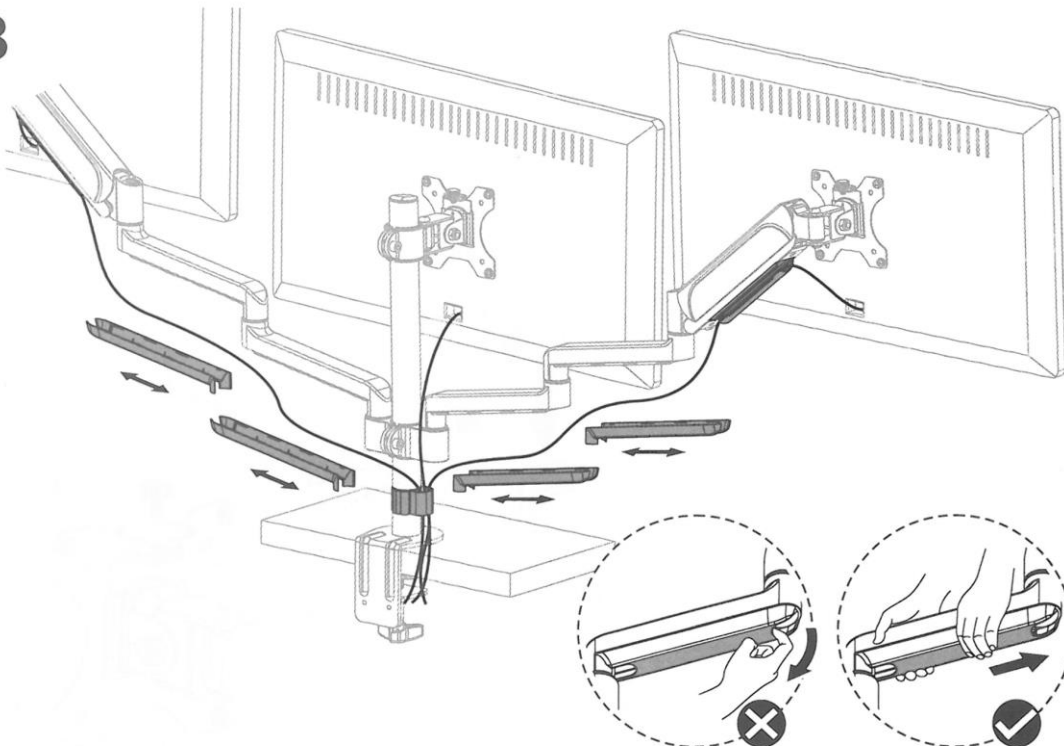

9

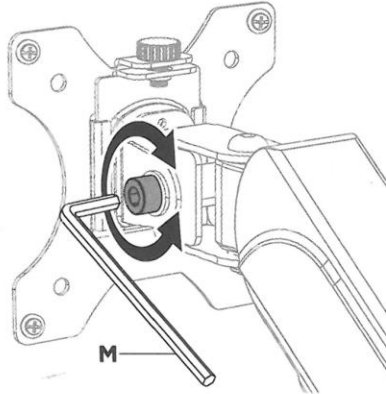

Note: If the display does not stop at your desired position, tighten the screws as shown.

