

Manual

Numeric keypad with Bluetooth **tipperCLAW-BN100**

Table of contents

Specifications:.....	2
Kit contents:.....	3
Keyboard shortcuts.....	4
Bluetooth pairing on iOS.....	5
Pairing via Bluetooth on Windows.....	6
Leds.....	8
Quick help.....	9

Specifications:

- **Warranty:** 1 year
- **Housing color:** value
- **Key Color:** White
- **Material:** Aluminum, ABS
- **Keyboard type:** membrane
- **Number of Keys:** 34
- **Additional functions:** number pad, function keys
- **Supported languages:** Polish, English, French, Russian, etc.
- **Supported Operating Systems:** Windows, Android, iOS, Mac
- **Wireless Communication:** Bluetooth V3.0
- **Wireless Operating Range:** Up to 10m
- **Working time:** up to 50 hours
- **Standby time:** up to 60 days
- **Charging time:** up to 2 hours
- **Key lifespan:** up to 3.5 million clicks
- **Power supply:** 110mAh lithium battery
- **Working Voltage:** 3.0~4.2V
- **Operating Current:** 3mA
- **Standby Current:** 0.5mA
- **Sleep Current:** 10 uA
- **Sleep time:** after 20 minutes
- **Interface:** micro USB
- **Device dimensions:** 14.6 x 11.4 x 1.1 cm
- **Package dimensions:** 15.5 x 12.5 x 3 cm
- **Device weight:** 140 g
- **Weight of the device with packaging:** 240 g

Kit contents:

- Wireless keyboard
- USB cable
- Manual

Keyboard shortcuts

The keyboard has the following function keys:



Screenshot



Search engine



Calculator app (Windows only)



ESC key function from the main keyboard. In the calculator, it deletes the contents of the input field.




TAB key function from the main keyboard. In the calculator, it switches between buttons.

Remark:

- The keyboard can only connect one device at a time.
- The keyboard will be paired automatically if it has already been connected to the target device.
- To ensure that the keyboard pairs correctly, you must remove the previously paired keyboard devices.
- The following buttons are not available on iOS:



- If the number buttons do not work after pairing the keypad, press and hold the 

Bluetooth pairing on iOS



Slide the power button to the on position (green background), and then press the pairing button. The blue LED will flash.



Launch the target iOS device, find the settings icon and click on it to go to system preferences.

devices.

Click on the Bluetooth icon to enable the option to search for Bluetooth




In the list of available devices, find "Bluetooth Keypad" and select it to pair.



Once successfully paired, the keyboard is ready to use.

If the blue LED is still flashing after pairing, charge the keyboard until the red LED turns off.


Pairing via Bluetooth on Windows

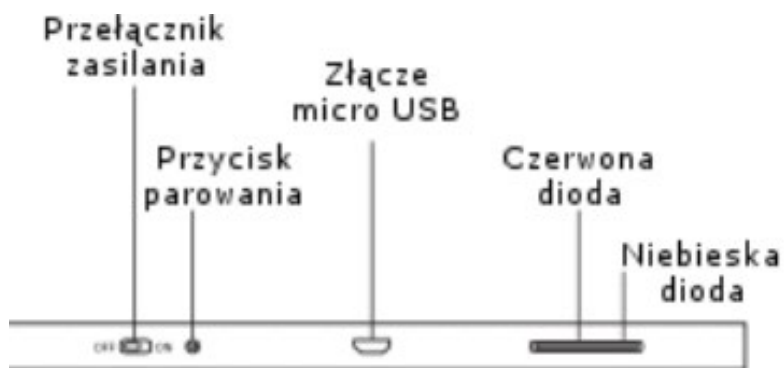

Slide the power button to the on position (green background), and then press the pairing button. The blue LED will flash.



Start the target Windows device, find the Windows logo icon on the screen, then find and click the system settings icon.

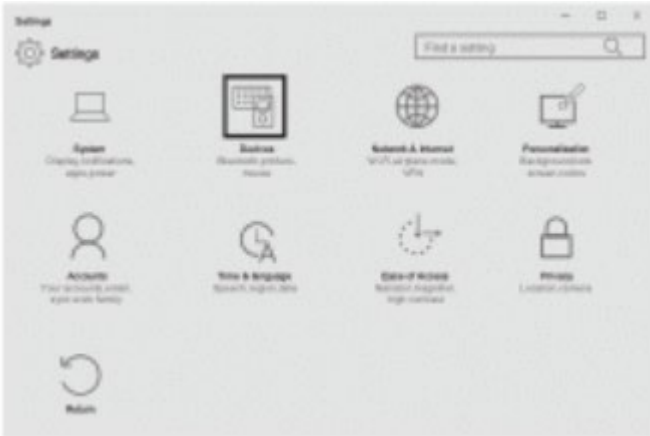

In the settings menu, select the devices icon, then select and click the Bluetooth icon.



Turn on the Bluetooth module and click the + icon to add a new device and enter the search state.

In the list of available devices, click on "Bluetooth Keypad" to connect to the keyboard.




Once successfully paired, the keyboard is ready to use.

If the blue LED is still flashing after pairing, charge the keyboard until the red LED turns off.

Leds

On/off

To turn on the appliance, move the power slider to the ON position. The blue LED will illuminate for three seconds and turn off.

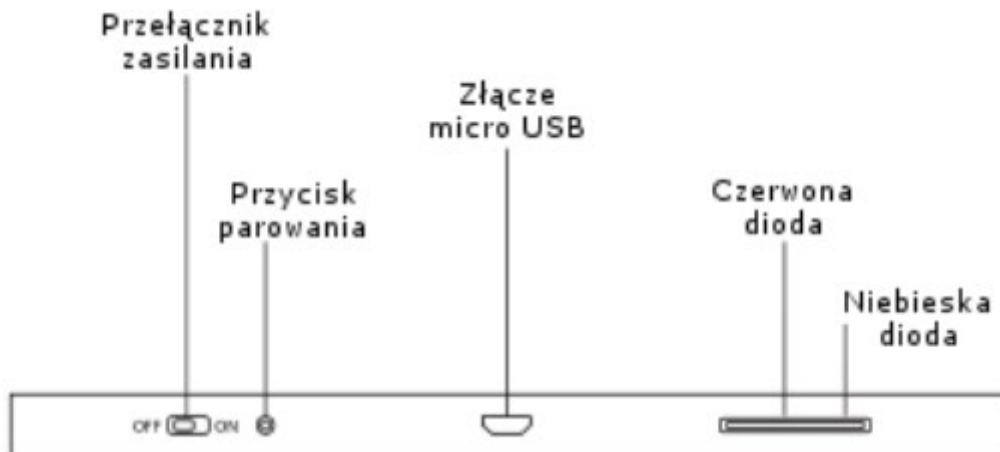

Pairing Mode

Move the power slider, then press the pairing button. The blue LED will flash.

Sleep

When the keyboard is turned on and not used for more than 20 minutes, it will automatically enter sleep mode to save power. To wake up the keyboard, press any key.

Low battery warning

When the keyboard is turned on, the blue LED will flash to indicate that the battery is low.

Charging indicator

The red LED will illuminate when the device is connected with a micro USB charging cable. When the keyboard is fully charged, the red LED will turn off.

Quick help

1. **Tablet/computer cannot connect to the keyboard**

Make sure your keyboard is charged. Low battery can lead to unpaired pairing.

2. **Blue LED flashes when using the keyboard**

The battery level is low, please connect the keyboard to power.

3. **Keyboard connected to tablet/computer does not work**

After 20 minutes of inactivity, the keyboard goes to sleep, saving power. In this case, click any key to activate it and wait 3 seconds.