

User Manual

Code reader

HD-SL62

Table of contents

- Specifications: 3
- Set contents:..... 4
- Features: 4
- Master codes..... 4
- Setting End Characters..... 5
- Case settings 5
- Reversed Code Reading Settings..... 6
- Prefix and Suffix settings 6
- Beep settings.....7
- Appendix 1. ASCII character table 9

Specifications:

- **Warranty:** 2 years
- **Material:** ABS + PC
- **Light Source:** 650nm diode Laser
- **Scan pattern:** single scan
- **Scanning method:** manual (push-button)
- **Scan Speed:** 50 times/second
- **Scanning from depth of field:** 0 - 350mm (0.33 mm pcs0.9)
- **Elevation angle:** 65°
- **Deflection angle:** 55°
- **Print Contrast:** 30 UPC / EAN 100
- **Daylight:** 5000 Lux
- **Voltage:** 5V
- **Current Draw:** 85 mA (Peak Current: 120)
- **Interface:** USB
- **Cable length:** 200 cm
- **Ingress protection:** IP54
- **Device dimensions:** 7 x 17 x 9 cm
- **Package dimensions:** 10 x 8 x 24 cm
- **Device weight:** 240 g
- **Weight with packaging:** 340 g
- **Operating temperature:** 0 to 45°C
- **Storage temperature:** -20 to 60°C
- **Operating Humidity:** 5 to 85% RH, non-condensing
- **Readable ID codes:** EAN - 8 EAN-13, UPC- A, UPC- E, Code 39, Code 128, EAN-128

Set contents:

- Wired barcode reader
- USB cable
- Manual

Features:

- **Scanner Type:** Laser
- **Scan button life:** up to 50 million clicks
- **Scan speed:** up to 50 times per second
- **Degree of protection :** IP5 class

Master codes



Restore to settings

Factory



Enable Setup Mode



Disable Setting Mode

Setting End Characters



No end marks



TAB



ENTER



Space


Case settings




No case change



Uppercase letters

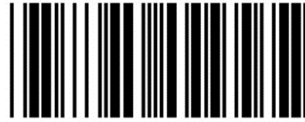

Lowercase



Uppercase and lowercase letters

Reversed Code Reading Settings



Enabled



Disabled

Prefix and Suffix settings



Set a prefix



Set a suffix

Beep settings



Normal tone of the beep



Short beep



Average beep length



Long beep



Low signal volume




Average signal volume



High beep volume



Startup sound enabled

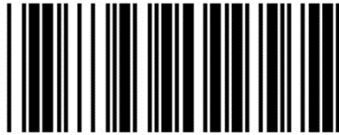


Startup sound disabled


Appendix 1. ASCII character table



SOH

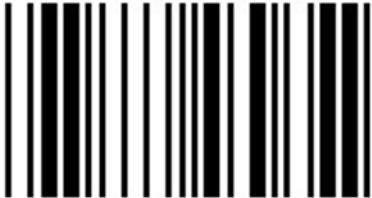

HT

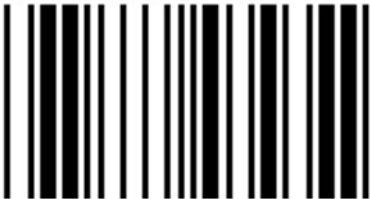

STX



LF




ETX



VT



EOT

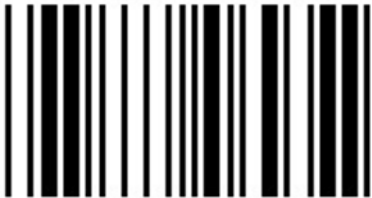

FF



ENQ



CR



ACK



SO



BEL



SI



BS




DLE




DC1



DC2

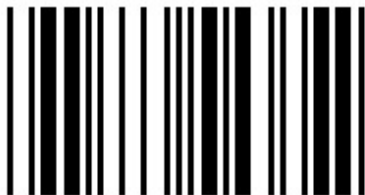


DC3

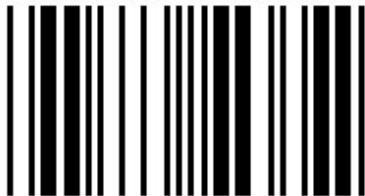

DC4




NAK

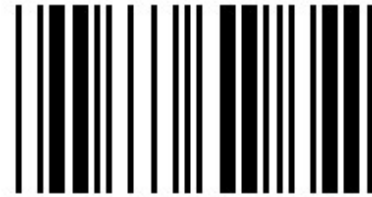


SUB



ESC

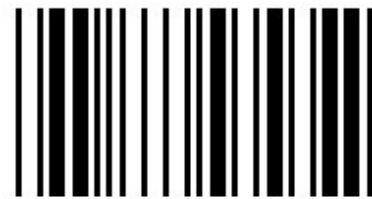

FS

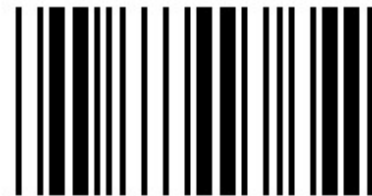

GS



RS



SYN



US



ETB



SPACE



CAN



!



EM



"



#



+



\$



,



%



-



(



0



)



1



*



2



3



;



4



5



6



7



<



=



>





8



@



9



A



:



B



C



K



D



E



F



G



L



M



N



About



H



I



J



S



P



Q



R



[



T



U



V



W



X



Y



Z



[



X



Y



Z



\



a



b



c



k



d



e



f



g



l



m



n



about



h



p



i



q



j



r



s



{



t



u



v



w



l




}



~



F1(@A)

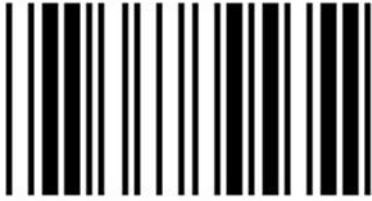

X




F2(@B)



y



F3(@C)

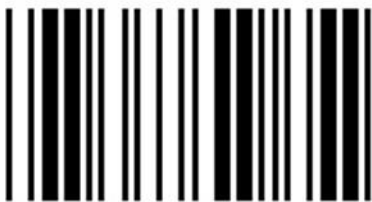

z



F4(@D)



F5(@E)



HOME(A)



F6(@F)



F7(@G)




F8(@H)



F9(@I)



END(&B)

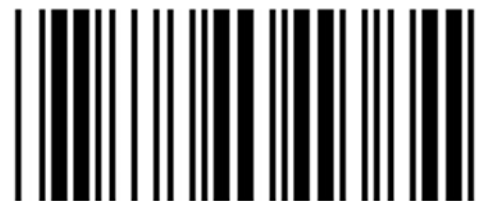

Prawa strzałka(&C)



Lewa strzałka(&D)



Top Arrow(&E)




F10(@J)




F11(@K)



F12(@L)

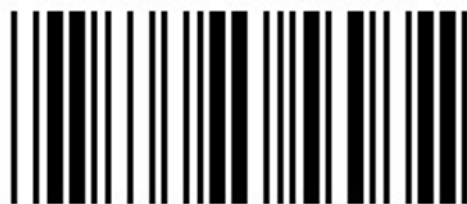

TAB(&I)

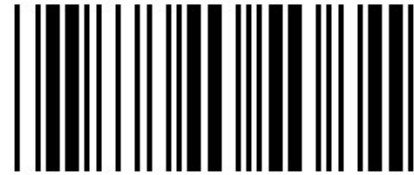


Dolna strzałka (&F)



PgUp(&G)



PgDn(&H)

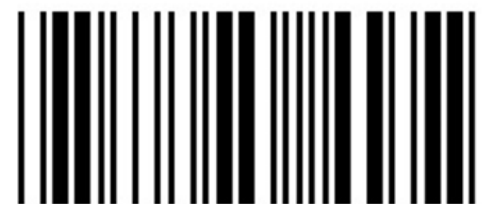

CTRL OFF(&Q)



Back TAB(&J)



ESC(&K)



ENTER(&L)



Insert(&M)



ALT ON(&R)



ALT OFF(&S)



SHIFT ON(&T)



SHIFT OFF(&U)



Delet(&N)




WIN (&V)




Return(&O)



HOME (&W)

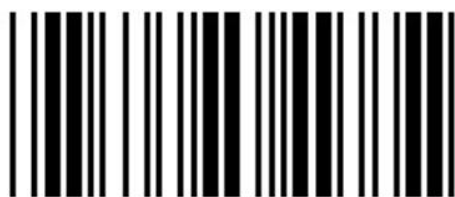

CTRL ON(&P)

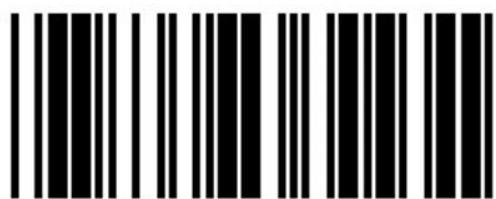

END (&X)